




# Pure Home Networking Component Video (Y-Pb-Pr) UTP Wallmount Module

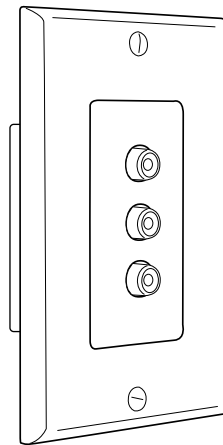

## 1. Specifications

**Impedance:** 100 ohm unbalanced

**Bandwidth:** 12 MHz DC

**Distance:** Video over Category 5e UTP cable: 480p and 720p, up to 328 ft. (100 m) total length, device-to-device

**Colors:** JHN2110A: Electric ivory;  
JHN2111A: Electric white

**110-Type Signals:** Pair 1: Y/Green; Pair 2: Pb/Blue;  
Pair 3: Pr/Red; Pair 4: No connection

**Connectors:** (3) RCA (Y/Pb/Pr) female, (1) 110-type rear punchdown

**Size:** 4.5"H x 2.7"W (11.4 x 6.9 cm)

**Weight:** 0.4 lb. (0.2 kg)

## 2. Overview

The Pure Home Networking Component Video (Y-Pb-Pr) UTP Wallmount Module is available in two colors. JHN2110A is electric ivory, and JHN2111A is electric white. The module enables you to use one CAT5e or CAT6 cable instead of three coax cables. This module should be attached to a single-gang Impressa faceplate. In-wall mounting eliminates external adapters. Figure 2-1 illustrates the module.

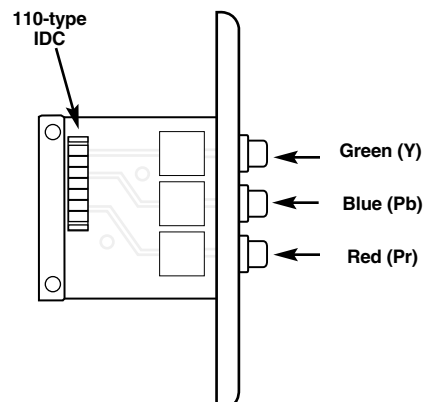


Figure 2-1. Component Video UTP Wallmount Module.

## 3. Installation

### 3.1 Tools You'll Need

- UTP termination tool
- Wire cutters

### 3.2 Cable Handling Guidelines

- Do not route telephone cables through the same cable holes as the AC power cables.
- For safety, separate all telephone cables from parallel AC power lines by at least 6 inches (15.2 cm) whenever possible. Avoid kinking the cable.
- Do not attach cable tie-downs too tightly. The cable-fastening hardware should not compress the cable sheath.
- Do not bend the cable sharply. Place the cables properly in the cable management after passing them through the holes, since the edges of the hole can compress or damage the cable sheath.
- When installing an individual module in the Pure Home Networking Box, place it above or below the interfacing module (if possible). This will eliminate excessive cable crossing.
- For your safety, do not use this or any electrical product near water (unless it is specifically designed for wet areas). Do not install wiring during thunder and lightning storms.
- Use caution when handling or installing any computer, telephone, video, or electrical devices.

### 3.3 Attaching a Module to a Wallmount Faceplate

1. Using the appropriate cable stripping tool, strip approximately 2" (5.1 cm) of the cable jacket.
2. Separate the pairs according to color (white-blue/blue, white-orange/orange, white-green/green, and white-brown/brown).
3. To terminate the connection, place each wire into the insulation displacement contacts (IDC) by matching the wire color with the applicable colors on the punchdown block.

#### NOTE

We recommend untwisting the pairs no more than 1" (2.5 cm) from the termination point.

4. If you are using a 110-type punchdown tool, position the tool over each wire with the cutting blade facing the outside of the IDC and punch down firmly.
5. Repeat the process with each pair.
6. Install the included termination caps firmly onto the IDC.
7. Fasten the insert and wallplate to an electrical box using the supplied screws.

*Any trademarks mentioned in this manual are acknowledged to be the property of the trademark owners.*

© Copyright 2005. Black Box Corporation. All rights reserved.

---

1000 Park Drive • Lawrence, PA 15055-1018 • 724-746-5500 • Fax 724-746-0746