



BLACK BOX[®]

NETWORK SERVICES


© 2003. All rights reserved.
Black Box Corporation.

Black Box Network Services • 464 Basingstoke Road • Reading, Berkshire, RG2 0BG • Tech Support: 0118 965 6000 • www.blackbox.co.uk • e-mail: techhelp@blackbox.co.uk

WALLMOUNT FRAMES

Key Features

- ▶ **Hold up to 75 pounds.**
- ▶ **Swing easily, even when fully loaded.**
- ▶ **Easy rear access for punchdowns or troubleshooting.**
- ▶ **Include slots for cable ties in top, sides, and bottom—and slots for VELCRO[®] cable ties make cable management simple.**

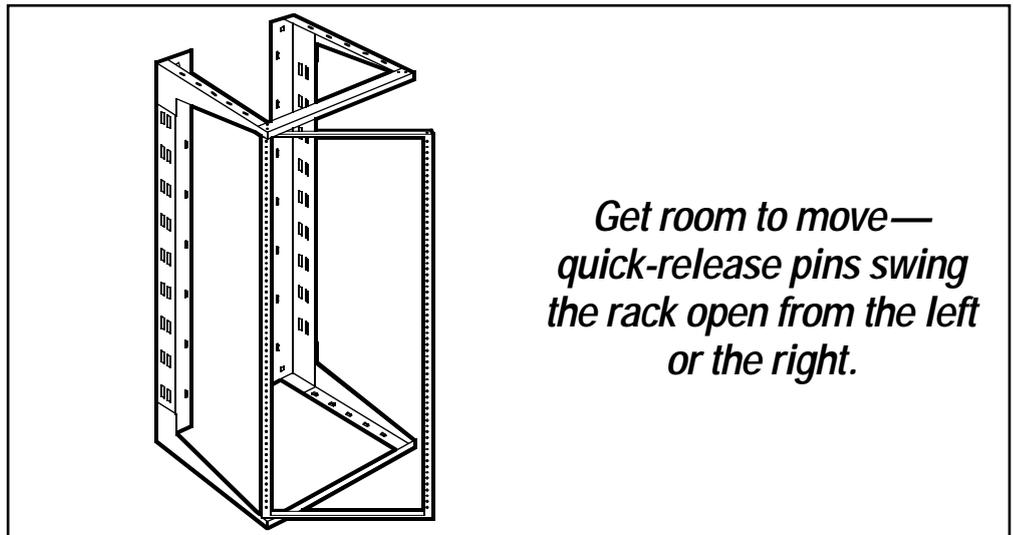

*Get room to move—
quick-release pins swing
the rack open from the left
or the right.*

Specifications

- Hole Spacing:**
Complies with EIA-310-D
- Hole Tapping:** 12-24 front and rear
- Load Capacity:** 75 lb. (34 kg)
- Material:** RM070A-R2, RM069A-R2:
14-gauge steel;
RM080A-R2: 12-gauge steel
- Rack Space Capacity:**
RM070A-R2: 12U;
RM069A-R2: 20U
RM080A-R2: 25U
- Size:** RM070A-R2: 23.9"H x 20.7"W x 18"D (60.7 x 52.6 x 45.7 cm);
RM069A-R2: 37.9"H x 20.7"W x 18"D (96.3 x 52.6 x 45.7 cm);
RM080A-R2: 46.7"H x 20.7"W x 18"D (118.6 x 52.6 x 45.7 cm)
- Weight:** RM070A-R2: 34 lb. (15.4 kg);
RM069A-R2: 44 lb. (20 kg);
RM080A-R2: 54 lb. (24.5 kg)

Shopping for the right-sized rack might remind you of a story about three bears...

You looked at the hinged wall brackets—but they're too small for your application. You looked at full-size relay racks—but they're too large.

Then you found Wallmount Frames—and everything was just right.

Wallmount Frames ease the tedious task of installing and maintaining your site wiring.

Quick-release spring-loaded hinges and release pins enable you to swing open the front part of the unit's frame to mount, dismount, and cable devices. And you can easily switch from left-to right-hand hinging.

In addition to their ease of use, Wallmount Frames are also cost-effective solutions for mounting heavy equipment up off the floor—so you save space!

Wallmount Frames have a maximum depth of 18". And

they're durable, too. They're constructed of 12- or 14-gauge steel to support a load-bearing capacity of 75 pounds (34 kg). Rack plenty of hubs and active components. To prevent stress on a unit's hinges, weight is distributed evenly across the lower part of the frame.

Each unit comes with 12-24 predrilled front and rear holes that meet TIA/EIA standards. Plus

each unit comes with equipment-mounting screws.

Assembly is simple. And with each Wallmount Frame's wide key-hole spacing and 16" stud-mounting centres, one person can install the unit in minutes.

Choose from 24" (61-cm, 12U), 38" (96.5-cm, 20U), or 47" (119.4-cm, 25U) models. For additional information, call Tech Support.

Ordering Information

ITEM	CODE
Wallmount Frames	
24"H (61-cm, 12U).....	RM070A-R2
38"H (96.5-cm, 20U).....	RM069A-R2
47"H (119.4-cm, 25U).....	RM080A-R2