



© 2005. All rights reserved.  
Black Box Corporation.

# BLACK BOX<sup>®</sup>

## NETWORK SERVICES

Black Box Network Services • 464 Basingstoke Road • Reading, Berkshire, RG2 0BG • Tech Support: 0118 965 6000 • [www.blackbox.co.uk](http://www.blackbox.co.uk) • e-mail: [techhelp@blackbox.co.uk](mailto:techhelp@blackbox.co.uk)

## RACKVIEW DISPLAY CONSOLE



### Key Features

- ▶ **Dual rail KVM rack drawer**
- ▶ **Utilises just 1U rack space**
- ▶ **Compatible with all KVM switching systems for multiple server access**
- ▶ **Adjustable to various rack depths from 45cm up to 100cm**
- ▶ **Plug & play installation requires no change to the installed base**
- ▶ **17" TFT LCD Display**

#### **Slim, 1U , rack mountable, KVM console drawer**

Black Box's RackView Display Console is a slim, rack-mountable console drawer for server management. Occupying just 1U of rack space, it's the most efficient way to control your server rack.

#### **Intelligent use of rack space and power**

RackView uses 85% less space than a standard keyboard, monitor, and mouse. Its low power consumption leaves more power for servers and storage.

#### **Universal compatibility**

Designed for compatibility, RackView is easily integrated with Black Box KVM

switches.

### Easy glide dual rails

The dual rail option lets you hide the keyboard and still view the screen even if the rack door is closed.

## Ordering Information

ITEM	CODE
17" RackView Display .....	RKUTFT-17

## Specifications

**Display Size:** 17"

**Panel Type:**

Active Matrix TFT LCD

**Resolution Capabilities:** Maximum

Resolution up to 1280x1024

**Pixel Pitch:**

Supports 0.264mm 2.264mm

**Audio In (Speakers):** No

**Viewing Angle:**

Right-Left view 65°-75 degree C

Up-Down View 45-60 degree C

**Contrast Ratio:** 350:1

**Brightness:** White 250cd/m<sup>2</sup>

**Back Light:** Dual Lamp for Back

Light

**Supported Colours:** 16M

**Keyboard Mouse:**

105 key ps/2 keyboard with touch pad.

**Video Input:**

Analog RGB input

**Sync:**

45°-80KHZ

**Input connector:**

Video HDD15 K/M MiniDin

**Power Source:**

90-240 VAC input

**Power Consumption:** 25W

**Temperature:**

Operate 0o - 55° degree C / 32° - 131 F

Storage -20° - 60° degree C / -4° - 140 F

**Humidity:** 10%~90%RH

**Response Time:**


Rising Time 2-6ms Decay Time

14-24ms


**Chassis Construction:** Rising Time

Heavy duty steel materials

Use a pair of video baluns to connect a single video source——such as a security camera——to a single monitor. Choose from video-only or audio and video models.

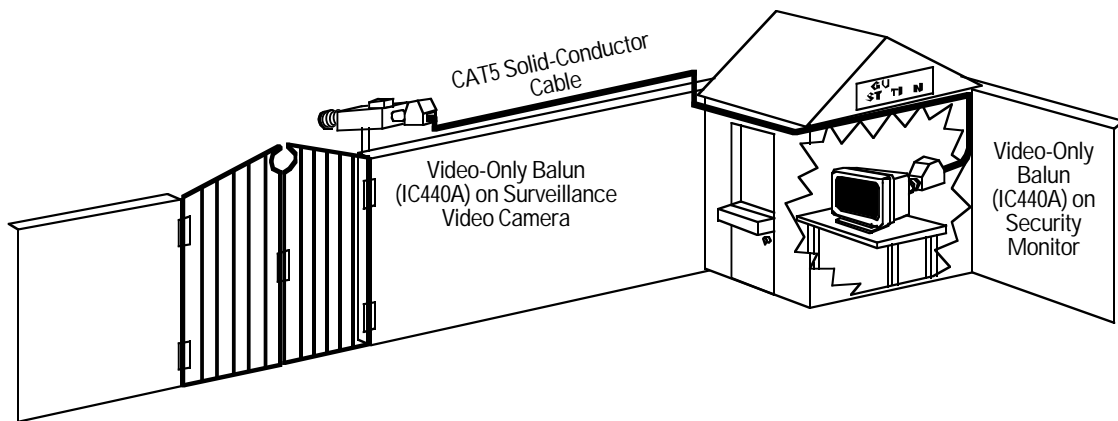

To connect a single video source to multiple monitors, choose the Video CCTV-A/V Hub. It supports two audio and two video channels, making it ideal for broadcasting television to multiple locations such as classrooms.

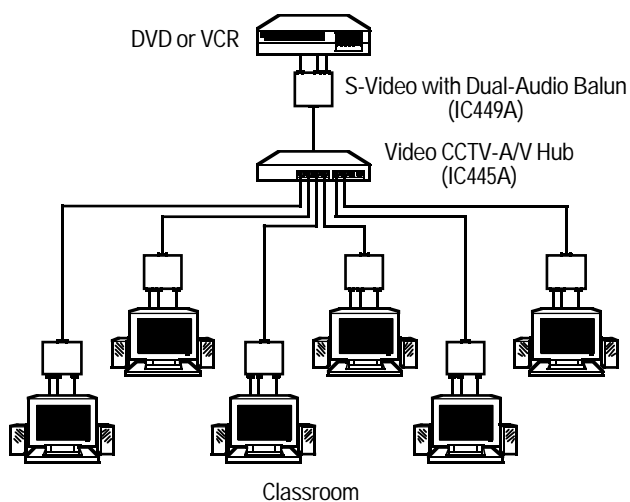

## Ordering Information

ITEM	CODE
Video Balun, 1-Way	
Video Only.....	IC440A
with Stereo Audio.....	IC441A-R2
RGB Video Balun .....	IC442A-R2
2-Way Video Mono Audio Balun .....	IC443A-R2
CCTV Video Balun.....	IC444A
Video CCTV-A/V Hub.....	IC445A
Dual-Audio/Video Balun .....	IC446A
S-Video Balun .....	IC447A
S-Video with Dual-Audio Balun .....	IC449A

*For optimum performance and a 20% savings, order:*  
 CAT5 Solid-Conductor Cable, 4-Pair, Straight-Pinned, PVC, Terminated.....EYN737MS  
 CAT5 Solid-Conductor Cable, 4-Pair, Straight-Pinned, PVC, Bulk .....

EYN737A  
 CAT5 Termination Kit.....FT470A-R2