


# CL1090A QUICK SETUP LOOPBACK TESTING ONLY

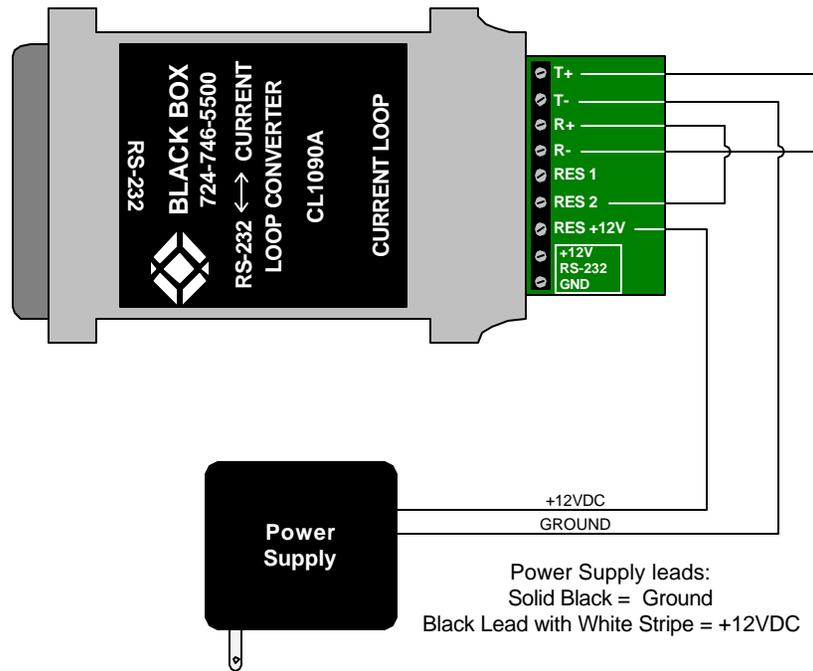

CL1090A can be ordered with either a male or female DB25 RS-232 connector.

Male = CL1090A-M  
Female = CL1090A-F