



To attach the mounting plate

The following instructions will help you install your DTX5000-MMK Monitor Mount Kit.

Should you require further assistance, please contact Black Box.

MONITOR MOUNT KIT

The monitor mount kit includes:

- One mounting plate
- Four #8 wood screws
- Four M4x12 pan head Phillips screws (black)
- Two rubber spacers
- One Quick Install Guide

OPTION 1: FLAT PANEL MONITOR MOUNT


1 Attaching the mounting plate to the flat panel monitor

NOTE: Refer to the flat panel monitor owner's manual to determine how to properly access the VESA mounting holes. Due to varying depth concerns in flat panel monitors, it may be necessary to provide your own screws for proper installation.

Place the mounting plate with studs offset toward the top and affix rubber spacers, if necessary. Using the four M4x12 screws, attach the mounting plate to the flat panel.

2 Attaching the Receiver

Align the holes on the bottom of the Receiver with the studs on the mounting plate and gently push the Receiver onto the plate.

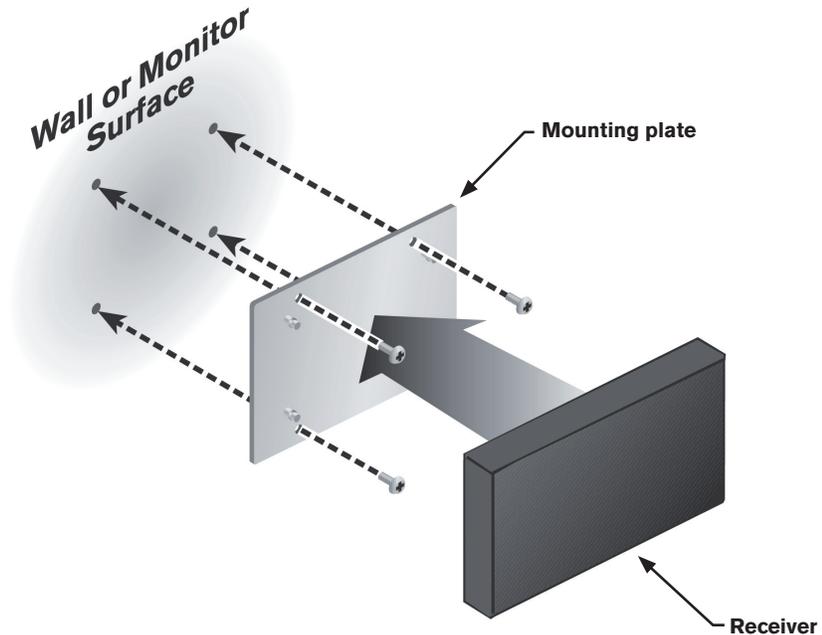

CAUTION: Do not apply pressure to the viewing surface of your flat panel screen.

OPTION 2: WALL MOUNT

1 Attaching the mounting plate

Attach the mounting plate flush to the selected wall surface with four #8 wood screws.

NOTE: Depending on the type of wall surface, a different type of anchor may be needed to secure the mounting plate.

2 Attaching the Receiver

Align the holes on the bottom of the Receiver with the studs on the mounting plate and push the Receiver onto the plate. Push downward to secure the Receiver into the plate.

CAUTION: For safe installation, mount this plate to a type of material that can easily sustain the weight of the Receiver and attached cables. Use caution in determining which screws are most suitable to use, taking into account the type of material to which the plate will be mounted.