




IBM PC Parallel Printer Adapter Cable

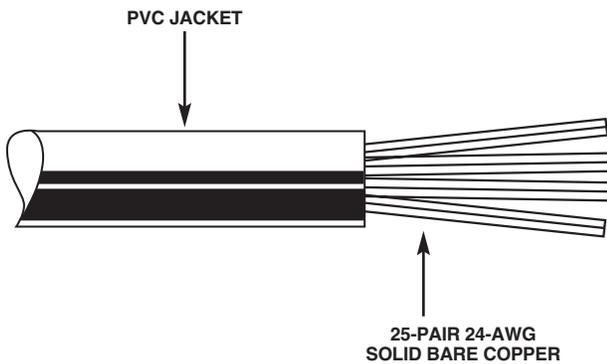

Specifications

Cable Construction: Twisted pairs, unshielded,
PVC insulated and jacketed

Capacitance: 36 pF/ft. maximum

Resistance: 28.6 ohms/1000 ft. maximum

Recommended Operating Voltage: 100 volts maximum

The IBM® PC parallel printer adapter cable connects an IBM PC/XT™, AT®, or compatible to a Centronics® compatible printer. It is multi-pair, 24 AWG solid, bare copper cable. The cable is insulated and jacketed, unshielded, twisted-pair cable. Wiring specifications are as follows:

Pin	Pin	Wire Color
19	19	White/Blue
1	1	Blue/White
2	2	Orange/White
21	20	White/Green
3	3	Green/White
4	4	Brown/White
23	21	White/Gray
5	5	Gray/White

CUSTOMER SUPPORT INFORMATION

Order **toll-free** in the U.S.: Call **877-877-BBOX** (outside U.S. call **724-746-5500**)
 FREE technical support 24 hours a day, 7 days a week: Call **724-746-5500** or fax **724-746-0746**
 Mailing address: **Black Box Corporation**, 1000 Park Drive, Lawrence, PA 15055-1018
 Web site: www.blackbox.com • E-mail: info@blackbox.com