





## ServSelect<sup>TM</sup> Rackmount Kit

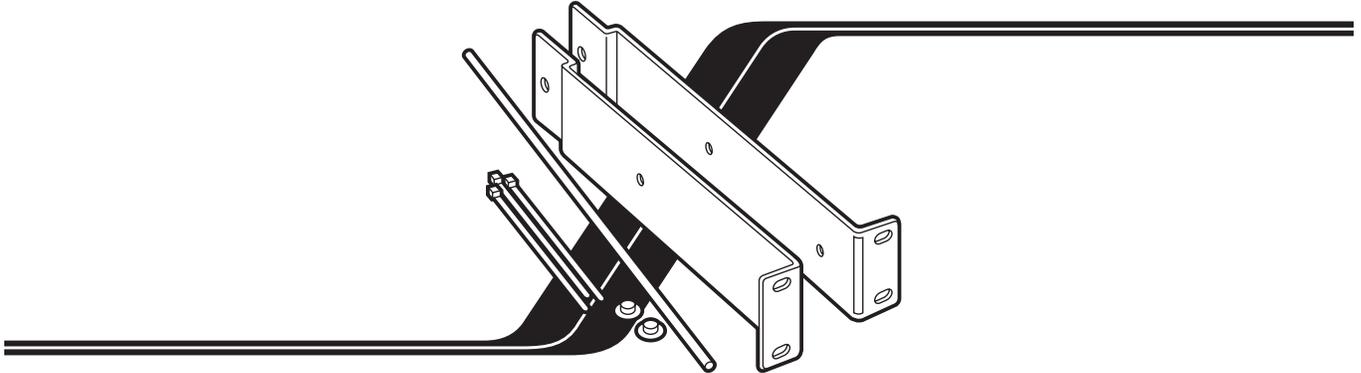

Use a ServSelect<sup>TM</sup> Rackmount Kit (our product code RMK19H) to mount a ServSelect (KV104A-R2 or KV108A-R2) in a 19" rack. Each of these Kits consists of two rackmounting side brackets, a cable-support rod, two press-on caps, and a set of tie wraps. To use a Kit to mount a ServSelect, take these steps, referring to the illustration below:

1. Remove the two screws that secure each side of the housing of the ServSelect.
2. Line up the holes in the "long side" of the Kit's side brackets with the screwholes in the ServSelect.
3. Thread the screws that you removed in step 1 through the holes in each of the Kit's side brackets and back into the screwholes on the ServSelect. Completely tighten (but *don't* overtighten) these screws.
4. Press one of the included caps onto one end of the cable-support rod. Slide the rod through both brackets as shown below, then press the other cap onto the other end of the rod.
5. Once the rackmount assembly is ready, match the holes in the "short side" of each bracket to an appropriate set of matching holes on your equipment rack, then screw the assembly to the rack using your own screws, bolts, or cage nuts (not included). When you install your ServSelect cabling, you can use the included tie wraps to secure cables to the cable-support rod.

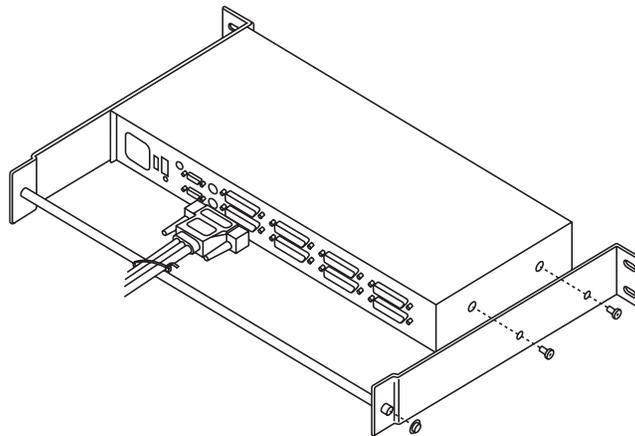

©Copyright 1998. Black Box Corporation. All rights reserved.

**CUSTOMER  
SUPPORT  
INFORMATION**

To order or for technical support: Call **724-746-5500** or fax **724-746-0746**  
Technical support and fax orders 24 hours a day, 7 days a week  
Phone orders 24 hours, 7 A.M. Monday to midnight Friday; Saturday 8 to 4 (Eastern)  
Mail order: **Black Box Corporation**, 1000 Park Drive, Lawrence, PA 15055-1018