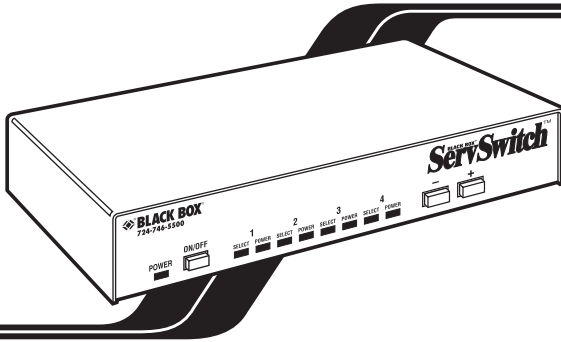# Addendum for the Non-Scan Version of the "-R2" ServSwitch™

Your non-scan "-R2" ServSwitch™ (product code SW721A-R2-NS or SW722A-R2-NS) is almost identical to the regular "-R2" ServSwitch described in the included manual dated November 1996. For the most part, you will be able to follow the directions in that manual to install, configure, operate, and troubleshoot your switch.

   The only difference between the non-scan models and the regular models is that the port-scanning features are disabled for security reasons in the non-scan models. This means that your switch doesn't respond to the keyboard commands that start scanning, stop scanning, and set the scan-delay time ([Ctrl] S, [Ctrl] X, and [Ctrl] Txx). It also means that the functions of the two far-right buttons on the switch's front panel are slightly different. Instead of "NEXT" and "SCAN," they're labeled "–" and "+": Press these buttons to switch to the previous CPU port in sequence or the next CPU port in sequence respectively.

   If you still have any questions about your switch after reading your manual and this sheet, please call Black Box Technical Support.

CUSTOMER
SUPPORT
INFORMATION

Order **toll-free** in the U.S.: Call **877-877-BBOX** (outside U.S. call **724-746-5500**)
FREE technical support 24 hours a day, 7 days a week: Call **724-746-5500** or fax **724-746-0746**
Mailing address: **Black Box Corporation**, 1000 Park Drive, Lawrence, PA 15055-1018
Web site: **www.blackbox.com** • E-mail: **info@blackbox.com**