



Heavy-Duty Sliding Adjustable Shelf

Specifications

Material: 14-gauge steel

Size: 2"H x 19"W x 29.2"D (5.1 x 48.3 x 74.2 cm)

Weight: 19.8 lb. (9 kg)

Weight Capacity: 125 lb. (56.7 kg)

Overview

The Heavy-Duty Sliding Adjustable Shelf fits in a standard 19" rack cabinet. It's constructed of 14-gauge steel and is vented for proper airflow between the equipment and the rack. The shelf supports up to 125 pounds (56.7 kg) of equipment.

Your package should include the following items. If anything is missing or damaged, contact Black Box at 724-746-5500.

- (1) Heavy-Duty Sliding Adjustable Shelf with (2) cable bridges installed
- (8) 10-32 screws
- (8) 12-24 screws
- (8) M6 screws
- (4) Wing nuts

Installation


1. Hold the cable support bar and pull the shelf out to remove the shelf tray from the assembly.
2. Mount the remaining part of the assembly to the mounting rails (of the desired height) using two appropriate screws (supplied) per bracket. Do not tighten the screws.
3. Slide the shelf tray back into the mounted portion of the assembly so that the slide locks together. Tighten the screws on the mounting brackets once the shelf tray is installed.

(Continued on the back of this page)

**CUSTOMER
SUPPORT
INFORMATION**

Order **toll-free** in the U.S.: Call **877-877-BBOX** (outside U.S. call **724-746-5500**)
FREE technical support 24 hours a day, 7 days a week: Call **724-746-5500** or fax **724-746-0746**
Mailing address: **Black Box Corporation**, 1000 Park Drive, Lawrence, PA 15055-1018
Web site: www.blackbox.com • E-mail: info@blackbox.com

4. Attach the cable bridges to the rear slot on the shelf tray using two wing nuts per bridge.
5. Place the equipment on the shelf. Route the equipment's cables over the cable bridges. Secure the cables to the cable bridges with cable ties (not included).

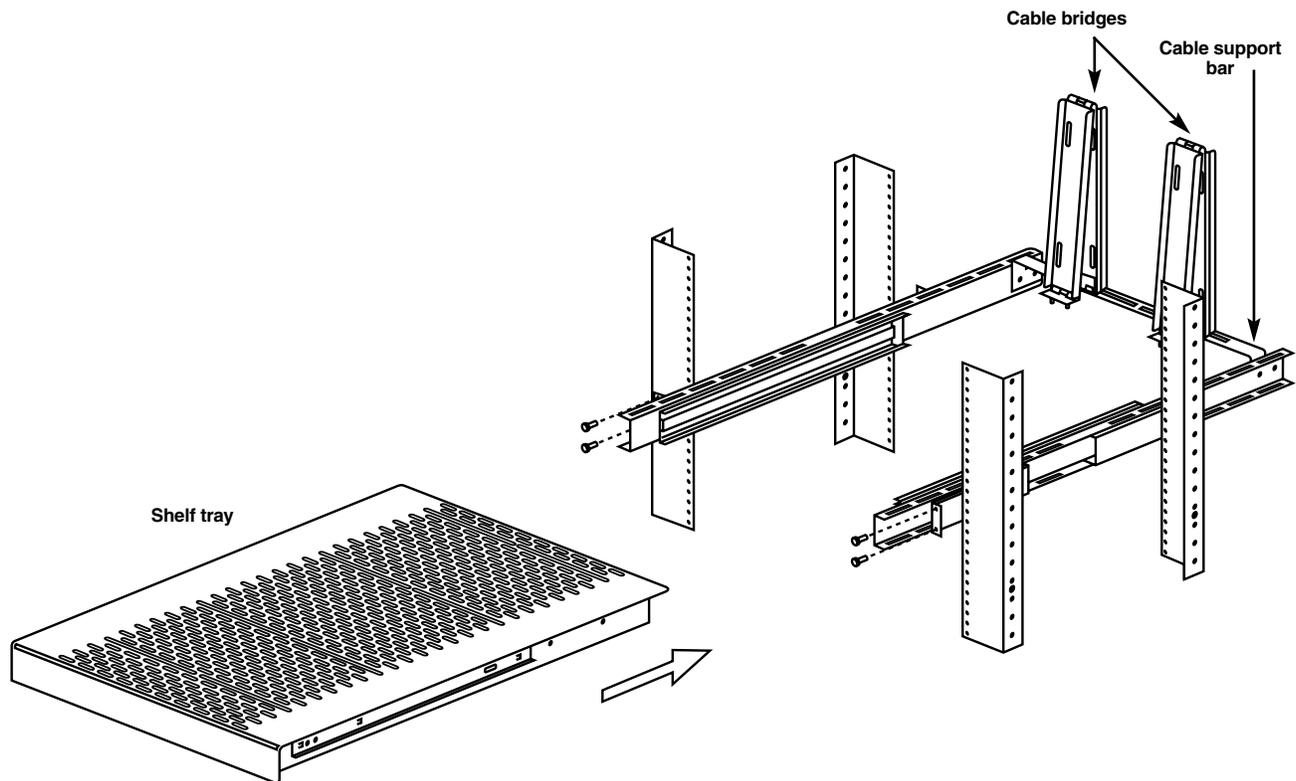

Installing the shelf.

TRADEMARKS USED IN THIS MANUAL

BLACK BOX and the Double Diamond logo are registered trademarks of BB Technologies, Inc.

Any other trademarks mentioned in this manual are acknowledged to be the property of the trademark owners.

© Copyright 2006. Black Box Corporation. All rights reserved.